


Our standard range of Bullseyes has been developed to meet the requirements of most Subsea applications.

Bullseyes are available in various diameter sizes with different incline measurement ranges.




Ø407MM

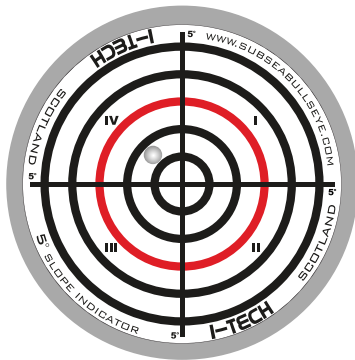

Ø350MM



Ø300MM



Ø250MM



Ø150MM



Ø100MM

| BULLSEYE DIAMETER | MEASUREMENT RANGE | PART NUMBER | DOMES DIAMETER | MAXIMUM HEIGHT | HEIGHT TO SHOULDER | MASS |
|-------------------|-------------------|-------------------|----------------|----------------|--------------------|--------|
| | | | | | | |
| Ø407 | 0° > 7° | ITECH/CVSI/407/7 | 313.2MM | 86.5MM | 62.5MM | 10.7KG |
| | 0° > 5° | ITECH/CVSI/407/5 | 313.2MM | 86.5MM | 62.5MM | 10.7KG |
| | 0° > 2° | ITECH/CVSI/407/2 | 313.2MM | 86.5MM | 62.5MM | 10.7KG |
| Ø350 | 0° > 15° | ITECH/CVSI/350/15 | 313.4MM | 102.5MM | 87.5MM | 10.6KG |
| | 0° > 10° | ITECH/CVSI/350/10 | 313.4MM | 92.5MM | 77.5MM | 8.5KG |
| | 0° > 7° | ITECH/CVSI/350/7 | 313.4MM | 83.0MM | 68.0MM | 8.0KG |
| | 0° > 6° | ITECH/CVSI/350/6 | 313.4MM | 83.0MM | 68.0MM | 8.0KG |
| | 0° > 5° | ITECH/CVSI/350/5 | 313.4MM | 83.0MM | 68.0MM | 8.0KG |
| | 0° > 3° | ITECH/CVSI/350/3 | 313.4MM | 83.0MM | 68.0MM | 8.0KG |
| Ø300 | 0° > 2° | ITECH/CVSI/350/2 | 313.4MM | 83.0MM | 68.0MM | 8.0KG |
| | 0° > 7° | ITECH/CVSI/300/7 | 313.2MM | 86.5MM | 62.5MM | 6.0KG |
| | 0° > 5° | ITECH/CVSI/300/5 | 313.2MM | 86.5MM | 62.5MM | 6.0KG |
| Ø250 | 0° > 2° | ITECH/CVSI/300/2 | 313.2MM | 86.5MM | 62.5MM | 6.0KG |
| | 0° > 7° | ITECH/CVSI/250/7 | 213.4MM | 83.0MM | 68.0MM | 4.0KG |
| | 0° > 5° | ITECH/CVSI/250/5 | 213.4MM | 83.0MM | 68.0MM | 4.0KG |
| | 0° > 3° | ITECH/CVSI/250/3 | 213.4MM | 83.0MM | 68.0MM | 4.0KG |
| Ø150 | 0° > 2° | ITECH/CVSI/250/2 | 213.4MM | 83.0MM | 68.0MM | 4.0KG |
| | 0° > 7° | ITECH/CVSI/150/7 | N/A | 60.5MM | N/A | 1.2KG |
| | 0° > 5° | ITECH/CVSI/150/5 | N/A | 60.5MM | N/A | 1.2KG |
| Ø100 | 0° > 2° | ITECH/CVSI/150/2 | N/A | 60.5MM | N/A | 1.2KG |
| | 0° > 7° | ITECH/CVSI/100/7 | N/A | 48.5MM | N/A | 0.5KG |

Bespoke Bullseyes can be made to your specification – please contact our design team with your requirements.

CLEARVIEW™ Mounting Systems are available to ensure installation and calibration of your Bullseye is quick and easy. More information is available at: www.subseabullseye.com and further details can be supplied on request.